




2018 Accessibility Inspector Question Of The Week


A vertical clearance of ____ inches minimum shall be provided at required accessible parking spaces for vans.

- A) 96
- B) 98
- C) 105
- D) 109




502.6 Vertical Clearance. A vertical clearance of 98 inches (2490 mm) minimum shall be provided at the following locations:

1. Parking spaces for vans.
2. The access aisles serving parking spaces for vans.
3. The vehicular routes serving parking spaces for vans.

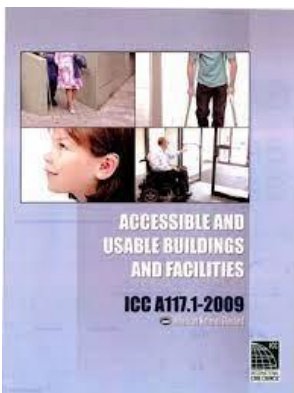

Note: these are minimum vertical clearances, some vehicles will exceed 98" in height

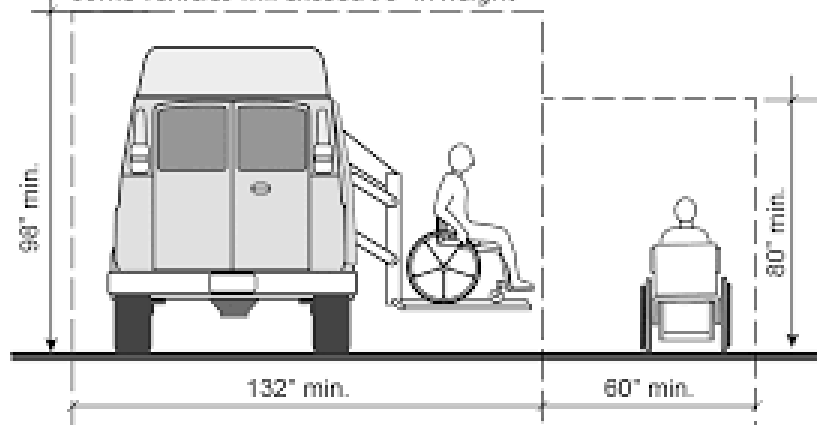

Van Parking Space Vertical Clearance