






2021 IBC Question Of The Week

When solid risers are not required by the IBC, the leading edge of treads shall project not more than _____ beyond the tread below.

- A) 3/4"
- B) 1"
- C) 1.25"
- D) When solid risers are not required, the nosing projection is permitted to exceed the maximum projection as long the tread depth does not exceed 12" beyond the face of the open riser.



1011.5.5.1 Nosing projection size. The leading edge (*nosings*) of treads shall project not more than $1\frac{1}{4}$ inches (32 mm) beyond the tread below.

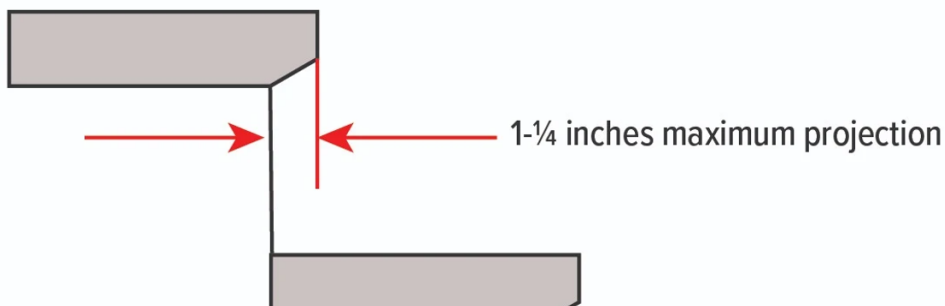

1011.5.5.1 Nosing projection size.

The nosings shall project not more than 1 1/4 inches (32 mm) beyond the tread below.

Exception: When solid risers are not required, the nosing projection is permitted to exceed the maximum projection.